

Leadworld
尼 为



上海尼为智能科技有限公司
SHANGHAI LWT INTELLIGENT TECHNOLOGY CO.,LTD.

CANNED

罐头生产线 production line

LEADWORLD GLOBAL

can supply solution for the whole set of auto production filling,packing and logistics system.

尼为您提供整套自动化生产、灌装以及包装、物流的系统解决方案。



上海尼为智能科技有限公司

SHANGHAI LWT INTELLIGENT TECHNOLOGY CO.,LTD.

<http://www.leadworld.cn>

<http://www.cannedline.com>

Youtube:<https://www.youtube.com/channel/UCKo790YWYj383ctZ0L971tA>

上海金山工厂 Jinshan Shanghai Factory

TEL: 021-67691848 37693309 67625651

FAX: 021-55733092-108

ADD: 上海市金山区张堰镇汇达路358号

358 Huida Road, Zhangyan Town, Jinshan District, Shanghai

E-mail: lw@leadworld.net



CONTENT 目录

05 杀菌机设备 Sterilization Machine



01 尼为简介 Leadworld Introduction



04 灌装机系列 Filling Machine



02 罐头生产线 Canned Production Line



03 清洗设备 Washing Machine

06 生产线、输送设备系列 Production Line / Conveyor





LEADWORLD can supply solution for the whole set of auto production filling,packing and logistics system.

尼为您提供整套自动化罐头、预制菜以及包装、物流的系统解决方案。

ABOUT LeadWorld

上海尼为智能科技有限公司是全球罐藏行业领军企业之一，自2009年成立以来，已在罐藏行业深耕十余年，业务遍及全球90多个国家和地区，专注于自动化罐头、预制菜、灌装、包装生产线设备的研发、设计、生产、销售和服务，致力于推动社会 and 行业发展进步，以实现更高效、更智能化、更可持续的未来。

尼为一直秉持创新引领发展、品质赢得市场、客户服务至上的经营理念，以成为全球领先的罐头生产线解决方案专家为目标，致力于引导罐头行业机械制作标准，积极推动罐头行业机械自动化水平提升，为中国和世界的罐藏事业贡献自己应尽的力量和责任。

Shanghai LWT Intelligent Technology Co., Ltd. is one of the leaders in the global canning industry. Since its establishment in 2009, it has been engaged in the canning industry for more than a decade, with operations in more than 90 countries and regions around the world. focus on automatic canning,ready-meal,filling, packaging production line equipment research and development, design, production, sales and service, committed to promoting social and industry development and progress, in order to achieve a more efficient, intelligent and sustainable future.

LeadWorld has always adhered to the business philosophy of innovation leading development, quality winning the market and customer service first, with the goal of becoming a global leading expert in canning production line solutions, and is committed to guiding the mechanical production standards of the canning industry. actively promote the level of mechanical automation in the canning industry, and contribute their due strength and responsibility to the canning industry in China and the world.





Our goal is leading the world

罐头生产线
Canned Production Line

01~21



► 水果罐头生产线
Fruit canned production line

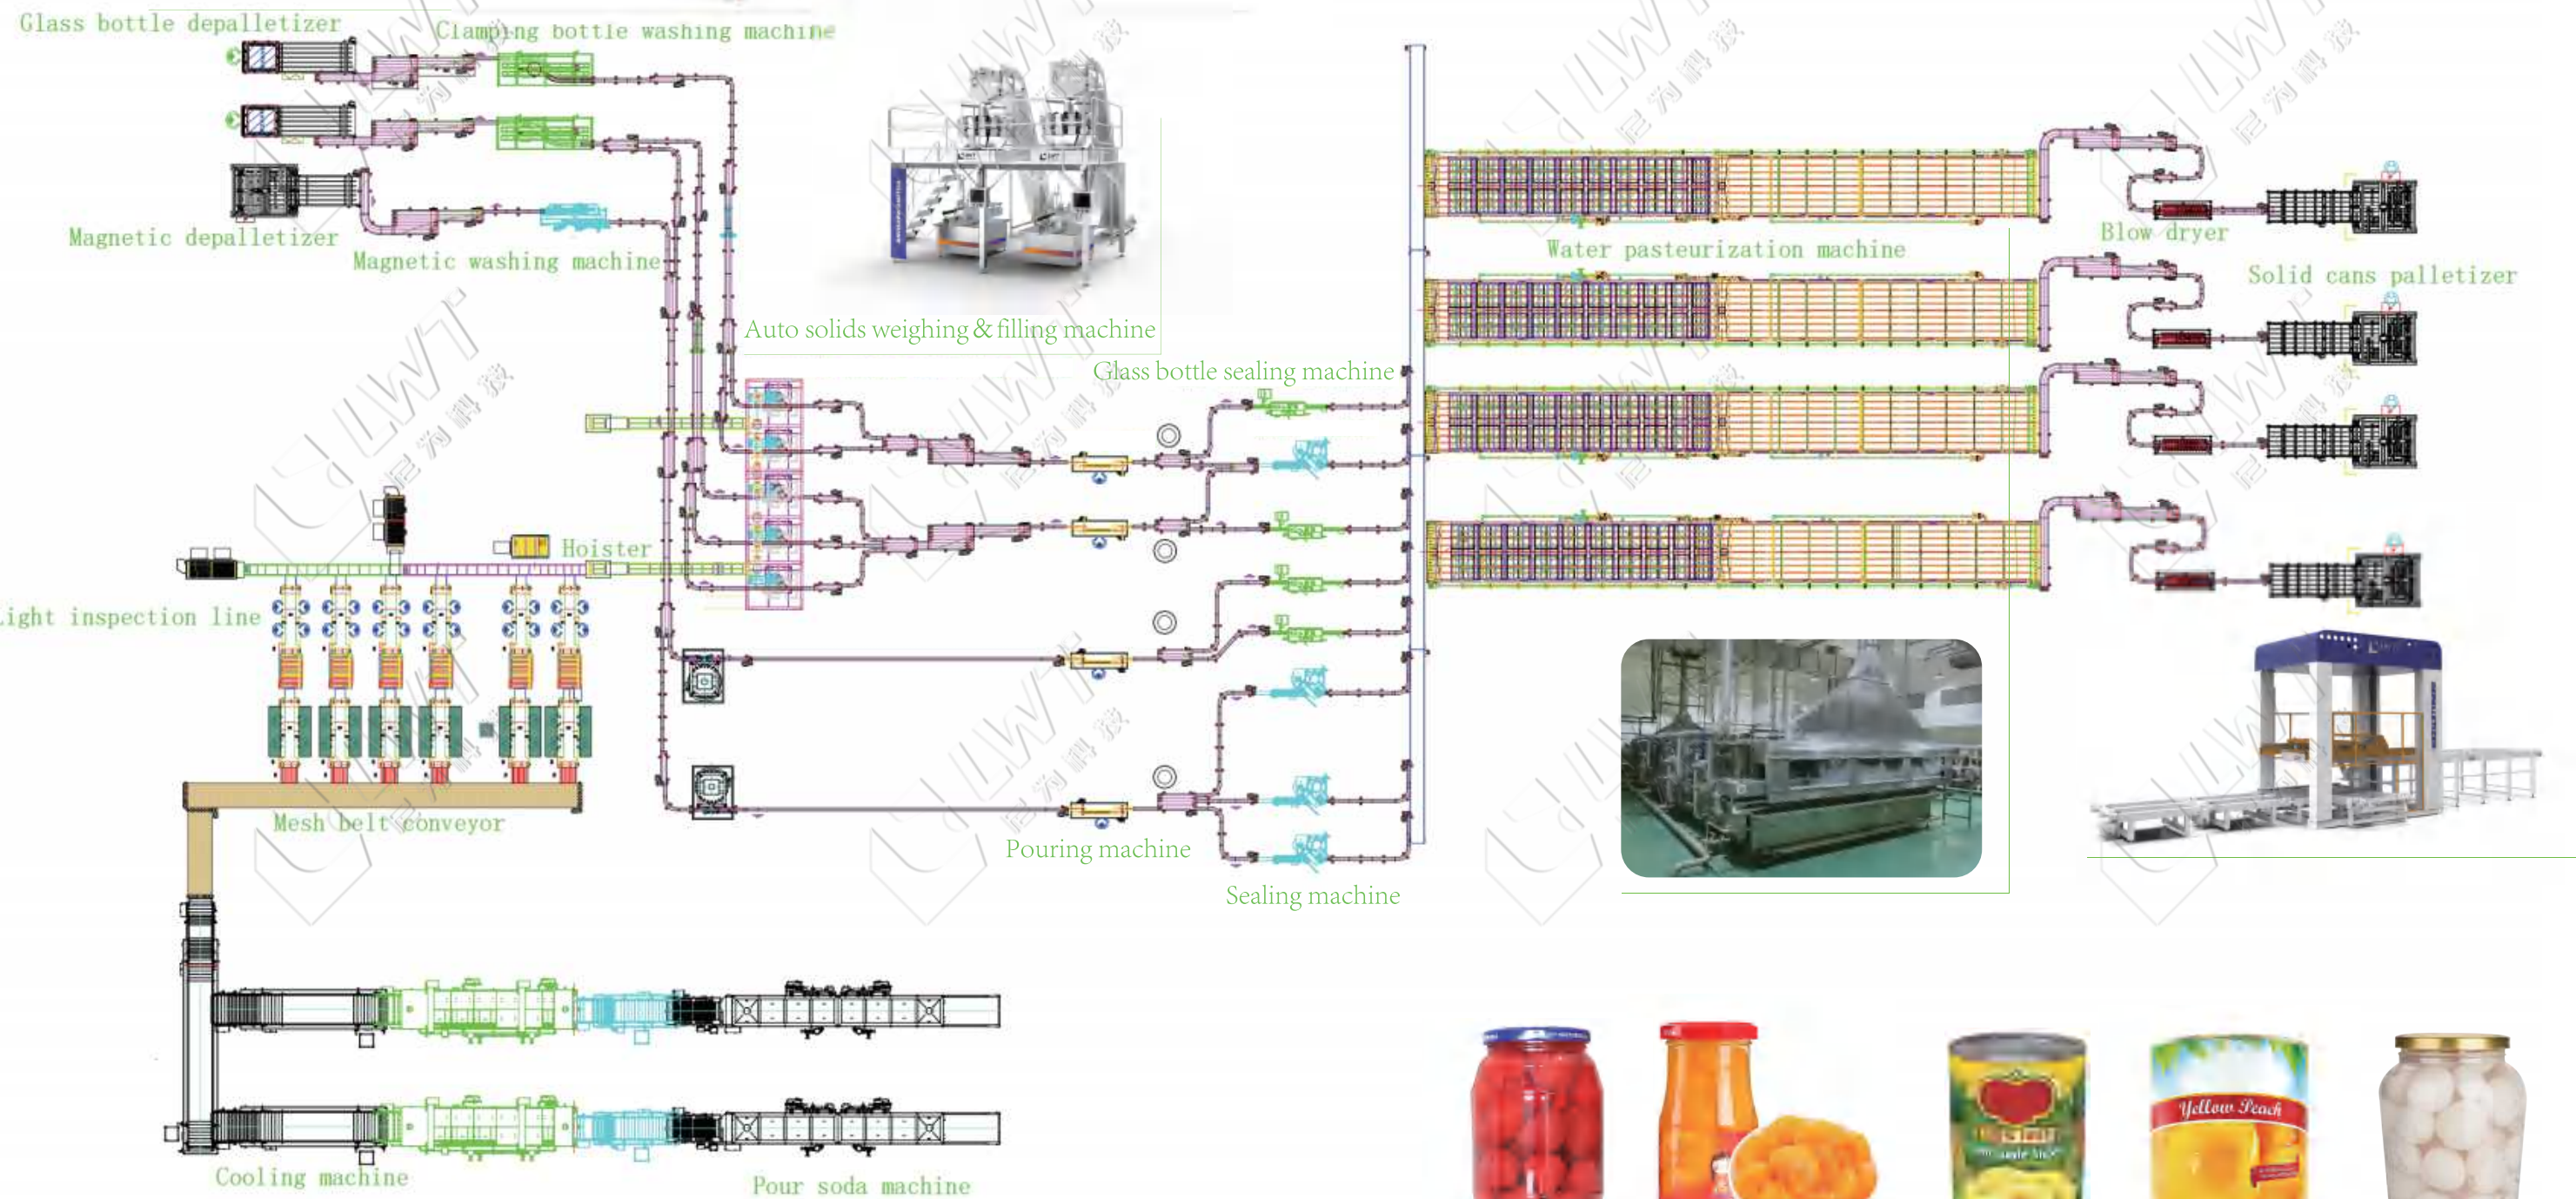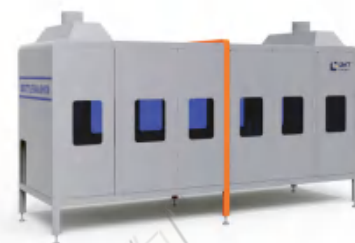

► **自动开瓣挖核及物料自动输送系统**
Automatic Cutting,Digging Pits



► **去皮清洗机 LW-WSB**
Peeler And Cleaner



► **翻瓣机 LW-AT1000**
Flip Machinery



► **修整线**
Fruit Trimming Line



► **切条机LW-AS**
Slicer



► **淋碱机 LW-AA1000**
Soda Water Sparying Machine



► **提升-翻瓣-淋碱-去皮-中和线**
Lifting Conveyor--Turnover--Pour Soda Machine--Peeling Machine-- Wash Neutralizer



► **清洗-去毛发**
Washing-removing Hairs



► 鱼罐头生产线

Fish Canned Production Line

尼为您提供整套金枪鱼、黄花鱼、带鱼、鲛鱼、沙丁鱼、鲭鱼等鱼罐头生产线。可根据厂房面积，提供从原料处理、洗罐、装罐、封口、装卸笼、杀菌到包装整套生产线设备，同时可为您提供整厂规划设计。

Shanghai LeadWorld is specialized in providing whole line of fish canned food, such as canned tuna, croaker, octopus, mud carp, sardine, mackerel and so on.

According to the plant area, we can provide a complete set of production line equipment from raw material processing, washing, filling, sealing, loading and unloading cages, sterilization until packaging, and can provide the entire plant planning and design.




► 肉罐头生产线

Canned Meat Product Line

尼为您提供整套午餐肉、火腿肉、红烧肉、鸡肉等罐头生产线。可根据厂房面积，提供从原料处理、洗罐、装罐、封口、装卸笼、杀菌到后道包装等生产设备，同时可为您提供整厂规划设计。

Shanghai Lead World is specialized in providing whole line of meat canned food, such as canned lunch, canned ham, canned braised pork, canned chicken and so on.

According to the area of the plant, we can provide production equipment from raw material processing, washing, filling, sealing, loading and unloading cages, sterilization until labeling and carton packaging, and can provide you with the entire plant planning and design.

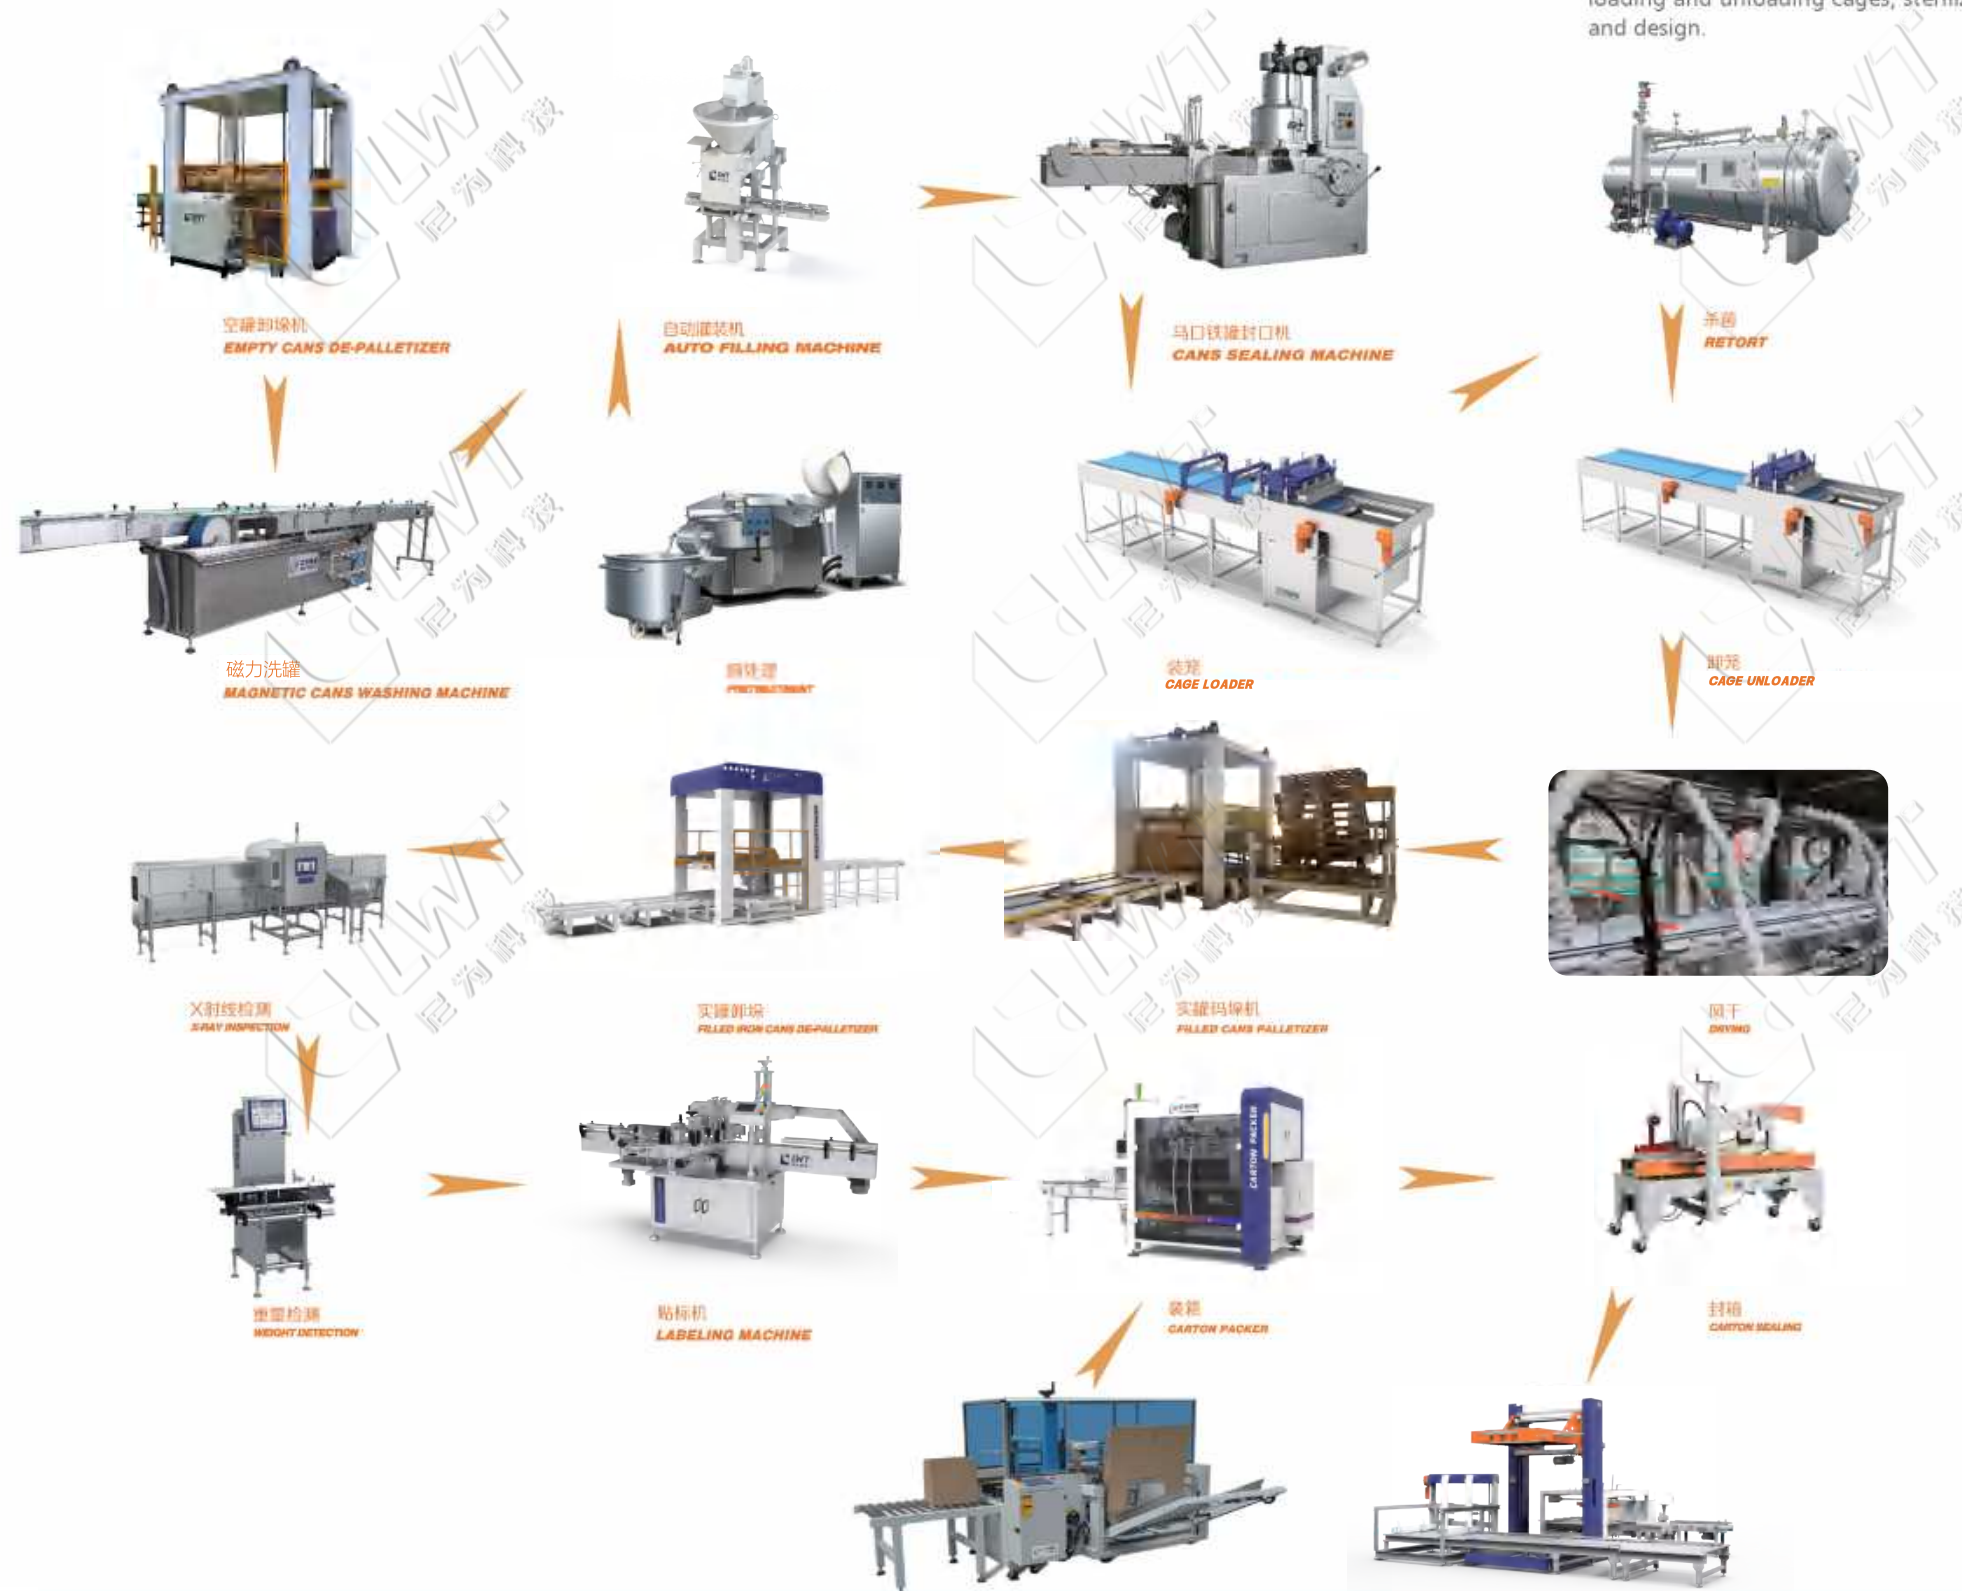

► 蘑菇罐头生产线

Mushroom Canned Product Line

尼为您提供整条蘑菇（双孢菇，滑子蘑，杏鲍菇，金针菇，香菇等）罐头生产线设备，根据厂房面积，提供从清洗、预煮、冷却、分级、修整、装罐、排气，杀菌等到后道包装线等生产线设备，同时还可以您提供整厂规划设计。

Shanghai LeadWorld is specialized in providing whole canning production line of mushroom canned food, such as Agaricus bisporus, slider mushroom, Pleurotus eryngii, Flammulina velutipes, Shiitake, etc. According to the plant area, we can provide cleaning, pre-cooking, cooling, grading, selecting, canning, exhausting, Sterilization and other production line equipment such as labeling and carton packaging line, and also can provide you with the whole plant planning and design.



豆类罐头生产线

Bean Canned Production Line

尼为您提供（法国刀豆、黄豆、青豆、鹰嘴豆、红豆、绿豆、豌豆等）豆类罐头生产线设备，可根据厂房面积，提供从清洗、预煮、冷却、分级、修整、装罐、排气，杀菌等到后道包装线设备，同时还可以为您提供整厂规划设计。

Shanghai LeadWorld is specialized in producing beans canned food line(sward beans, yellow bean, green bean, chickpea bean, red bean, green peas); we can offer whole plant design, from washing, pre-cooking, cooling, grading, selecting, filling, exhausting, sterilization and so on until caron packing.




► 浓酱灌装生产线

Thick Sauce Filling Product Line


浓酱灌装线适用于玻璃瓶、塑料瓶、马口铁罐等容器。主要应用于番茄酱、番茄沙司、果酱（可含颗粒）、甜酱、辣椒酱、花生酱、芝麻酱、沙茶酱、巧克力酱、蛋黄酱等灌装。

The thick sauce filling line is suitable for containers such as glass bottles, plastic bottles and tinplate cans. It is mainly used for filling tomato sauce, jam (may include particles), sweet sauce, chili sauce, peanut butter, sesame sauce, barbecue sauce, chocolate sauce, mayonnaise, etc.

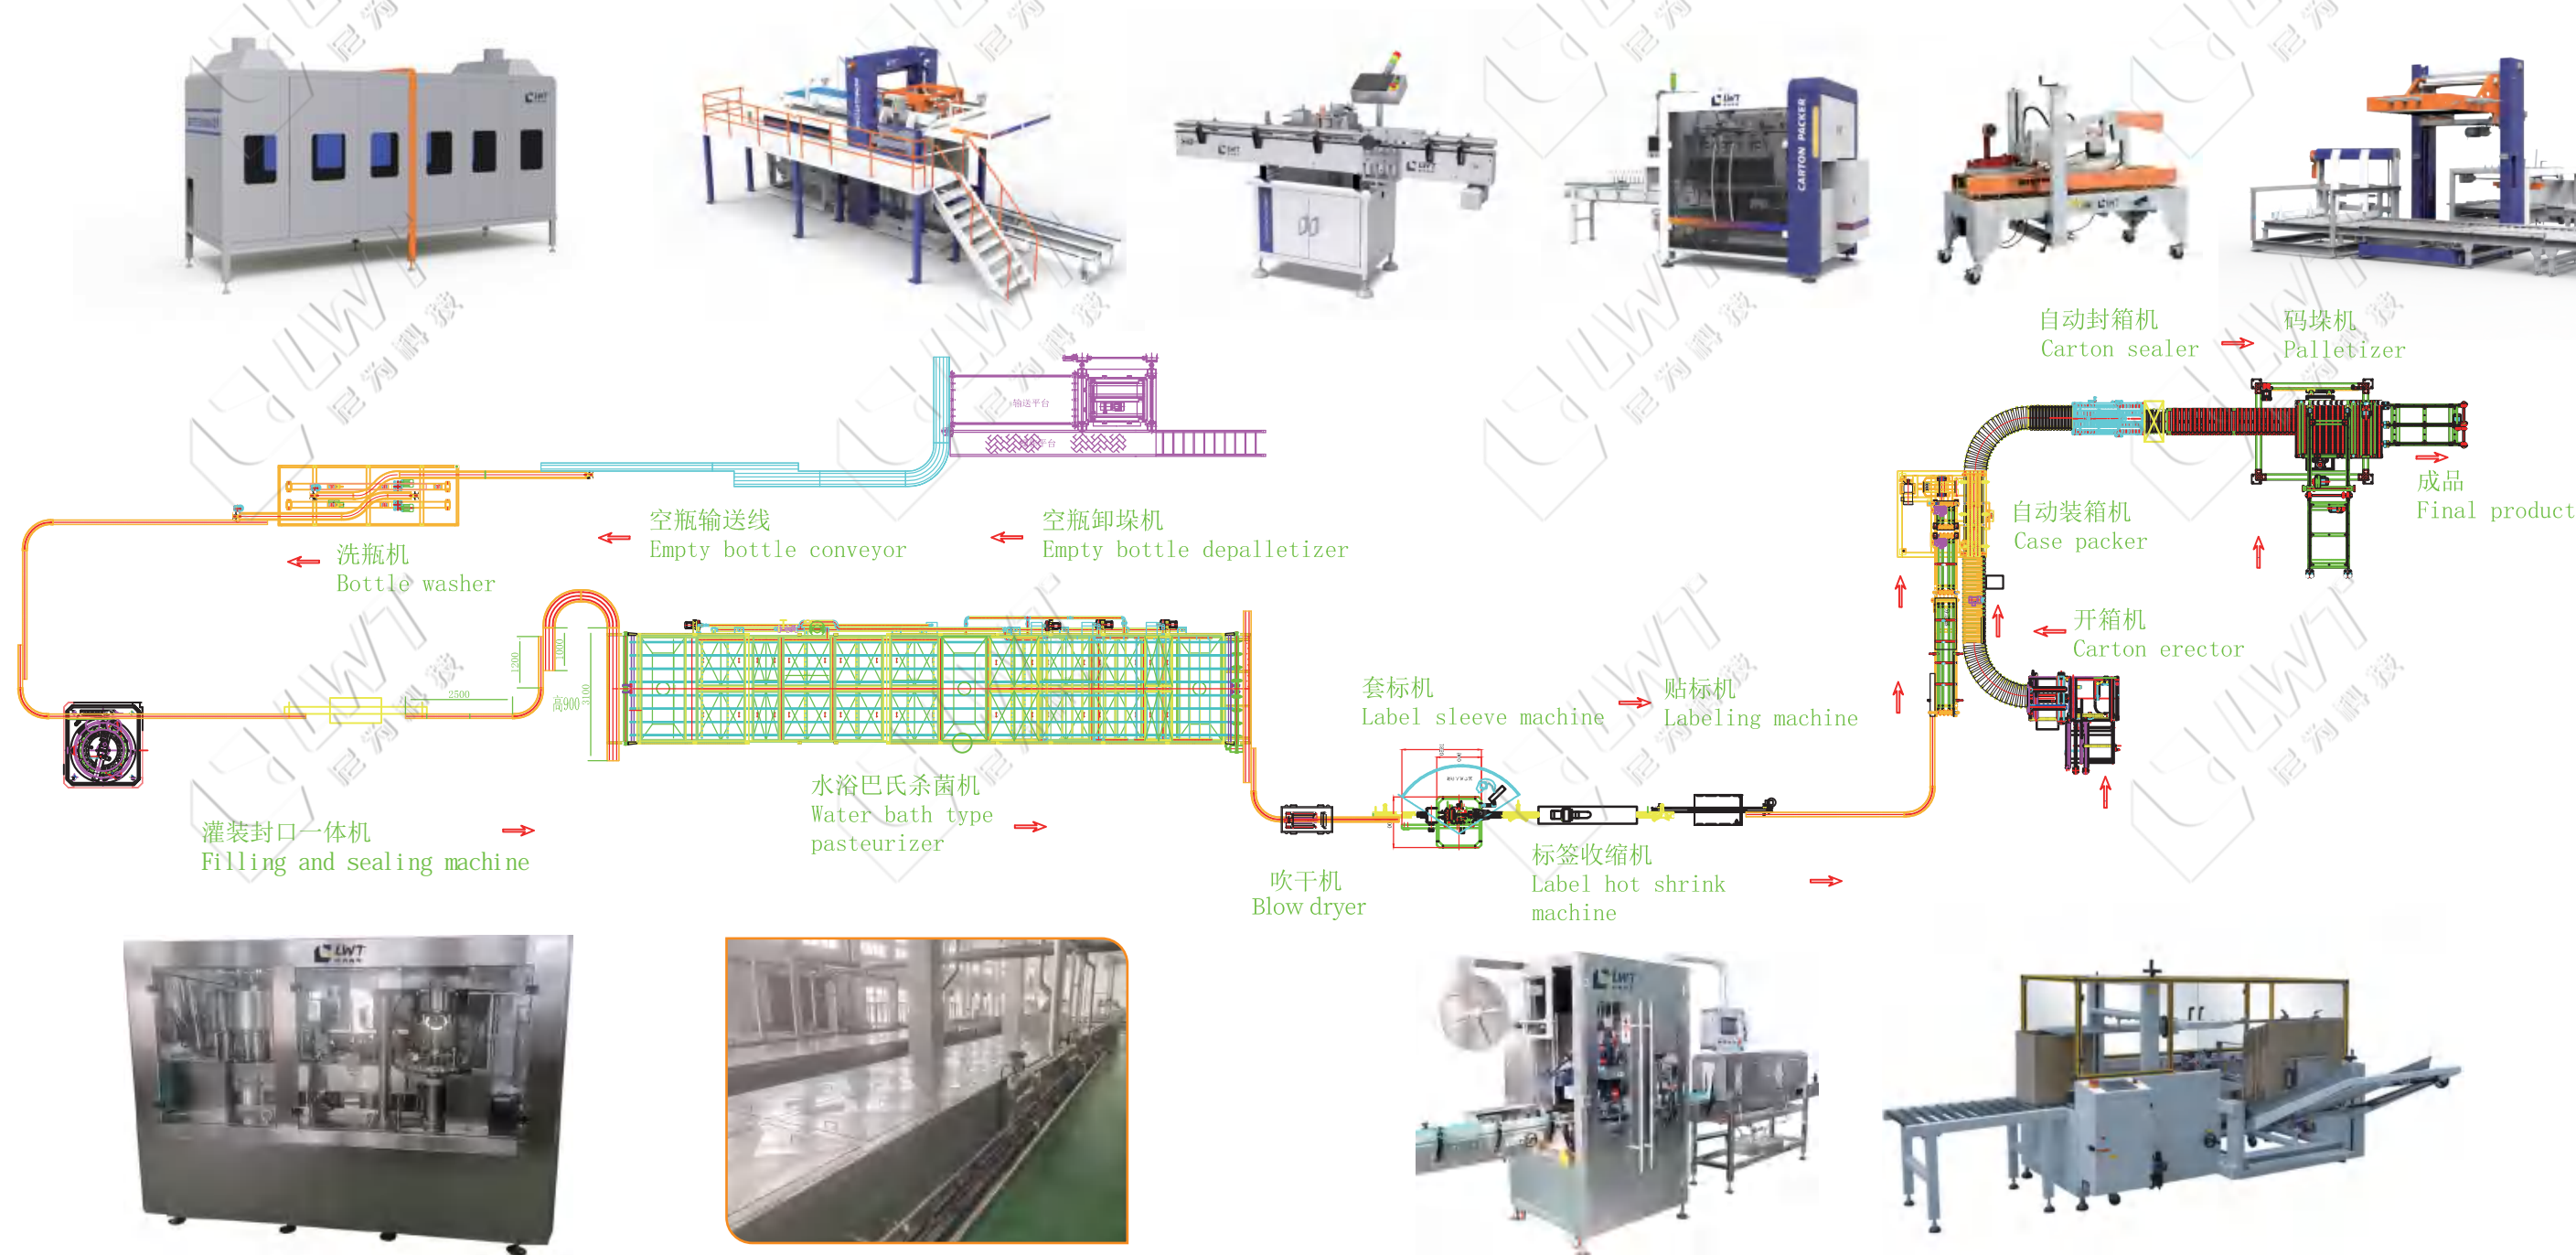

► 鲜切果蔬生产线

Fresh-cut Fruit and Vegetable Production Line

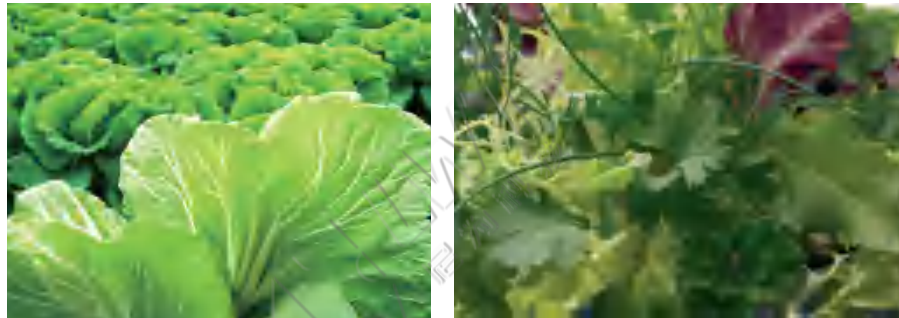

自动单桶离心脱水机
Automatic single barrel centrifugal dehydrator

喂料输送机
Feeding conveyor

离心出料输送机
Centrifugal discharge conveyor

双层缓冲输送机
Double-layer buffer conveyor

鼓泡清洗机
Bubble washing machine



► 预制菜生产线
Ready meals production line



自动上料
Automatic feeding



原料清洗
Washing




挑选线
Selection line



预煮冷却
Precooker-cooler



调味
Seasoning

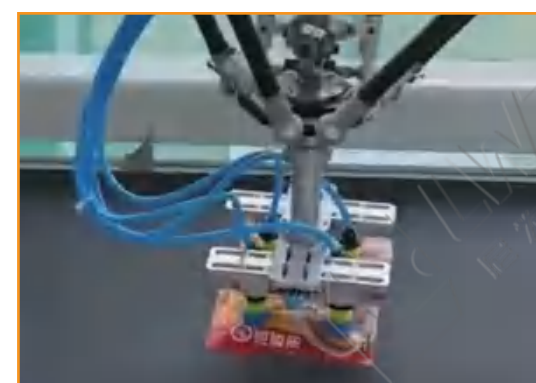

机器人装箱机
Robot packaging machine



吹干
Drying



洗袋
Bag washing



杀菌
Sterilizing



包装
Packaging

► 宠物罐头生产线

Pet Food Canned Production Line

尼为您提供整套宠物罐头生产线设备。可根据厂房面积，提供从原料处理、空罐卸垛、洗罐、装罐到实罐清洗、装卸笼、码垛等生产线设备，同时可为您提供整厂规划设计。

Shanghai LeadWorld is specialized in whole line producing of pet canned food. We can offer whole plant design according to your working house size, from raw material processing, empty cans depalletizer, cans washing, filling, filled cans washing, loading and unloading for retort, palletizer until carton packing and so on.




切丁机
Dicing machine

斩拌机
Bowl cutter

清洗设备
Washing Machine

20~25

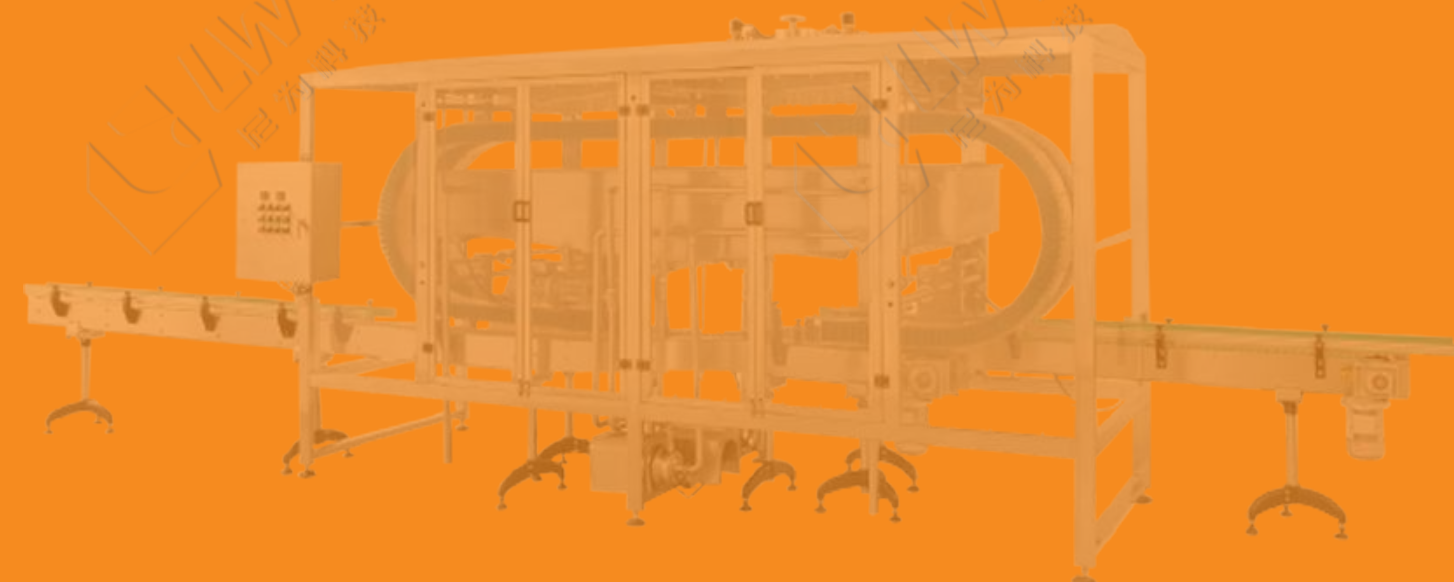

▶ 对夹式洗瓶机 Clamping Bottle Washer



该机采用进口边夹链与耐高温夹块，适用于各种不同形状的容器，可完成玻璃瓶、PET塑料罐的消毒、冷热清洗、吹干。操作方便，维护简单，瓶型的变化只需简单调整，不需要更换零件。是现代化罐头饮料、调味品生产企业的理想设备。

The machine use high temperature resistant gripper to grip the bottle, and is applicable to wash many different bottle shapes. Also, the machine can complete cleaning and blow drying process for such containers as glass bottle, and PET plastic cans without changing any parts, only need to adjust. Thus, the machine is the ideal equipment for modern canned beverage and condiment production enterprises.



主要技术参数 Main Technical Parameter

型号 Model	LW-WC100	LW-WC200	LW-WC300
生产能力 Capacity	4000-6000 BPH	8000-24000 BPH	12000-30000 BPH
适应瓶型 Bottle	瓶高Bottle H: 60~300mm 瓶径Bottle diameter: $\phi 40 \sim \phi 180$ mm		
喷水压力 Water spray pressure	0.2~0.4MPa		
喷气压力 Air injection pressure	0.2~0.4MPa		
电机功率 Motor Power	5.35kw	5.35kw	5.35kw
外型尺寸 Machine size	3200 × 1500 × 1800	4200 × 1500 × 2300	4200 × 1500 × 2300

► 磁力洗罐机


Magnetic washing machine

本机主要用于多种规格的马口铁罐（圆罐、异型罐）的连续性清洗，罐型变换只需简单调整，无需更换配件。采用蒸汽加热(电加热可选择)，温度可调；高压喷嘴，清洗效果好、结构合理、生产效率高。

This machine is mainly used for continuous washing for various kinds of tin cans(round cans, special shape of cans). Different shape and size of cans only need adjust the machine, no need change accessories. Adopt steam heating(Electrical heating optional), temperature is adjustable; high pressure water sprayer; The cleaning effect is good, the structure is reasonable, and the production efficiency is high.

技术参数 Data

型号 Model	LW-WM300	LW-WM100
生产能力 Product capacity	100-300cans/min	50-100cans/min
清洗段 Washing section	2段清洗 (2 sections washing)	1段冲洗 (1 section washing)
适用罐径 The can diameter	40-150mm	40-150mm
电机功率 The motor power	1.5kw	1.1kw
外形尺寸 Dimension	3000*900*1000mm	2000*900*1000mm

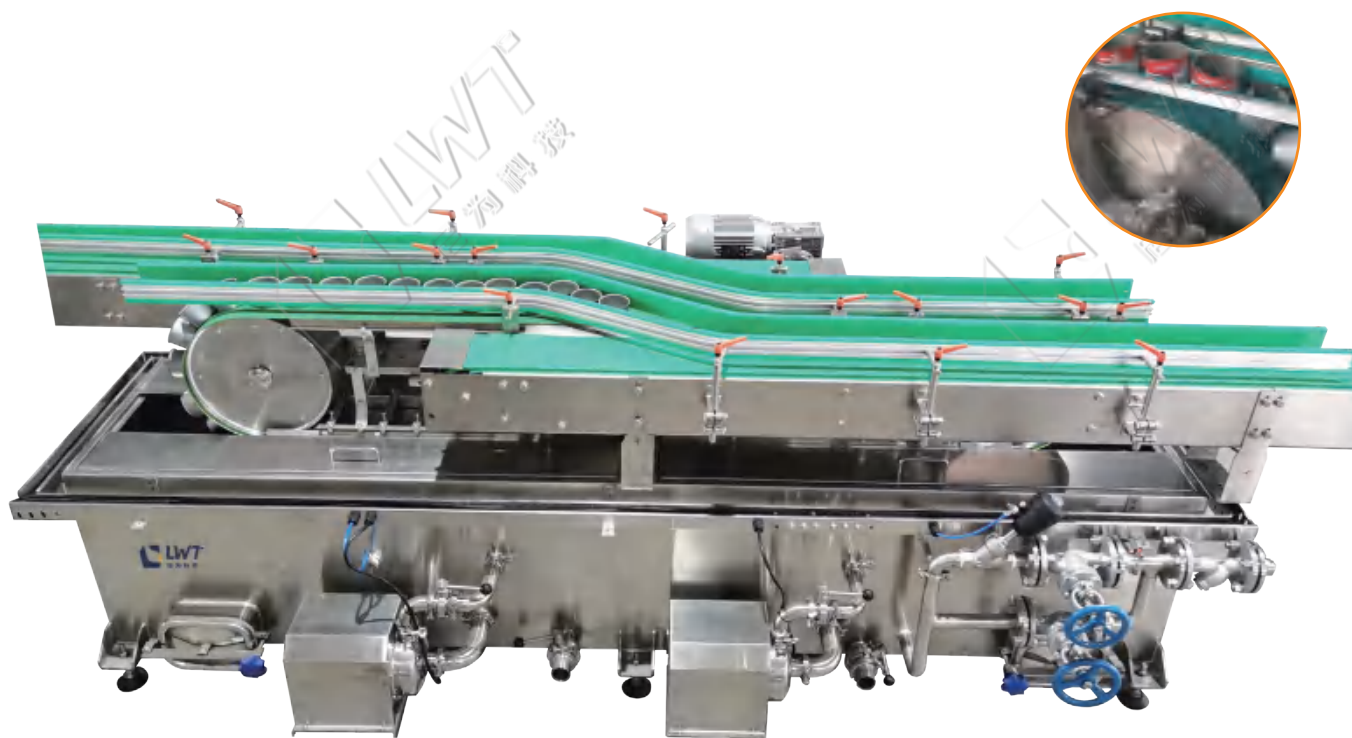

► 鼓泡清洗机 LW-WB500

Bubble Washing Machine

特点

鼓泡清洗机是针对外形要求高的物料设计，适用于：蔬菜、水果、水产品等颗粒状、叶状、根茎类产品清洗、浸泡。

该设备在气泡、冲浪、提升、喷淋、毛刷等联合作下，具有洗洁净高、节能节水、设备稳定可靠等特点。

冲洗水经过过滤后循环使用；自带提升、方便连线。

Descriptions

The bubble cleaning machine is designed for materials with high shape requirements. It is suitable for cleaning and soaking of granular, leafy and rhizome products such as vegetables, fruits and aquatic products.

The equipment has the characteristics of high cleanliness, energy saving and water saving, and stable and reliable equipment under the combined work of air bubbles, surfing, lifting, spraying and brushing.

The rinse water is filtered and recycled; it is self-contained and easy to connect.



涡流清洗机
Vortex washing machine

► 实罐清洗机 LW-WTB100

Filled Cans Washing Machine




应用于各种水果罐头，肉类罐头，瓶装酱类及各种饮料的外表面清洗吹干（罐头或饮料封口后粘附在罐外的糖水及粘附物），适用马口铁罐、玻璃瓶、塑料瓶。

It is applied to clean and dry outside surface of all kinds of canned fruit bottle, canned meat bottle, sauce bottle and all kinds of drinks bottle. (specialized in washing and drying the adhesive sugar water and other adhesion outside of the sealed canned products bottle or beverage bottle), applying for tin cans, glass bottles and plastic bottles.

► 洗筐机 Basket Washing Machine

隧道式洗筐机主要用于食品加工厂（屠宰、肉类、水产、蔬果、饮料、酿造等）食品物流中心、配送中心等。也适用于周转筐、盘、箱、托盘等器具的清洗和消毒。节省用水量达70%，可比人工清洗方法能节省人力7-8人。

Basket washers are mainly used in food processing plants (slaughtering, meat, aquatic products, fruit and vegetable, beverage, brewing, etc.), food logistics center, distribution center, etc. It is also suitable for cleaning and disinfection of containers, pallets and other containers. Save water 70%, save manpower 7-8 people than manual cleaning method.

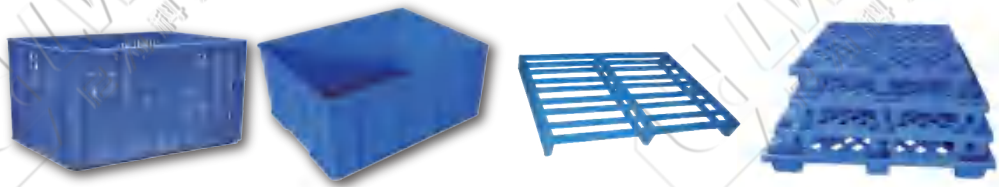

主要技术参数 Main Technical Parameter

Parameter	Model	LW-WTC600	LW-WTC800	LW-WTC1000
工艺流程 Process flow		热水洗、高压洗、漂洗、吹干 Hot water wash, high pressure wash, rinse, dry	热水洗、高压洗、漂洗、吹干 Hot water wash, high pressure wash, rinse, dry	热水洗、高压洗、漂洗、吹干 Hot water wash, high pressure wash, rinse, dry
生产能力 Product capacity		400~600pcs/h	600~800pcs/h	800~1000pcs/h
较大清洗尺寸 Large cleaning size		L650*W500*H400mm	L650*W500*H400mm	L650*W500*H400mm
外形尺寸 Dimension		L4000*W1600*H1700	L8000*W1600*H1700	L8000*W2000*H1700
电机功率 The motor power		AC380V 50Hz 7KW	AC380V 50Hz 17KW	AC380V 50Hz 13KW
耗水量 water consumption		300L/h 0.3MPa	500L/h 0.3MPa	500L/h 0.3MPa
蒸汽消耗 Gas consumption		80~120kg/h 0.5MPa	120~200kg/h 0.5MPa	120~240kg/h 0.5MPa

灌装机系列 Filling Machine

26~33



► 自动固型物装罐机

Auto weighing and filling machine

本机适用于玻璃罐，马口铁罐，塑料罐，广口瓶等容器。主要应用于黄桃瓣、桃条、桃丁、梨块、梨球、山楂、草莓、葡萄、杏、荔枝、红烧肉、鸡肉等罐头产品的自动计量装罐。

This machine is suitable for glass jar, iron cans, plastic jars, big mouth bottle and so on. Mainly used to peach flap, peach strip, peach dicer, pear chunk, pear, Hawthorn, strawberries, grapes, apricots, lychee, braise in soy sauce meat, chicken and so on, any kinds of solid product's canning measuring and filling.

型号: LW-FWS50

Model: LW-FWS50

产量: 2400-3000瓶/小时

Capacity: 2400-3000bph

计量范围: 50g-2000g

Measuring range: 50g-2000g

计量精度: $\pm 2-10g$

Measurement accuracy: $\pm 2-10g$

防护等级: IP55以上

IP Grade: more than IP55



▶ 振动固型物灌装机 Vibration Solids Filling Machine

本机适用于玻璃瓶、马口铁罐、塑料罐、广口瓶等容器。主要用于黄瓜、桃条、梨球、山楂、草莓、葡萄、杏、橄榄、豌豆等罐头产品的装罐。


This machine is suitable for glass bottles, tin cans, plastic cans, jars and other containers. It is mainly used for canned food products such as cucumber, peach slice, pear pieces, hawthorn, strawberry, grape, apricot, olive, peas and so on.



参数 Parameters

型号Model	LW-FVS200	LW-FVS300
产量 capacity	12000BPH	18000BPH
防护等级 IP Grade	IP55以上 (more than IP55)	IP55以上 (more than IP55)

▶ 丁料罐装机 Diced Food Filling Machine

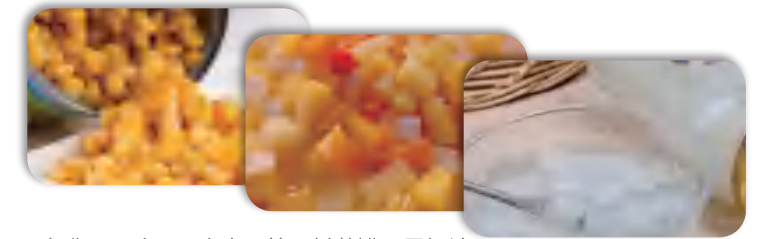

描述

该丁料罐装机主要用于蔬菜、水果、玉米、红豆、绿豆、芸豆、鹰嘴豆、豌豆、小肉丁等丁料装罐。量杯计量，灌装范围可调节。整机采用不锈钢制作，配置西门子PLC、施耐德电气元件，机器运行稳定、可靠。

Descriptions

The machine is mainly used for vegetables, fruits, corn, red beans, mung beans, kidney beans, chickpeas, small diced meat and so on. Adapt measuring cup measurement method, the filling range can be adjusted. The whole machine is made of stainless steel and equipped with Siemens PLC, schneider electrical components, the machine runs stably and reliably.



参数 Parameters

型号 Model	灌装头数 Feeding Heads	功率 Power	灌装速度 Filling Speed	喂料盘尺寸 Feeding Tray Size	设备尺寸 Dimension
LW-FCS-12A	12	1.5kw 380V,50HZ,三相电 1.5kw 380V,50HZ,Three Phases	3000~6000BPH	700*150mm	1500mm*1400mm*1600*h (高度根据瓶高来定) machine height is customized according to bottle height
LW-FCS-24A	24	1.5kw 380V,50HZ,三相电 1.5kw 380V,50HZ,Three Phases	6000~12000BPH	1100*120mm	1880mm*1780mm*1600*h (高度根据瓶高来定) machine height is customized according to bottle height

► 酱菜灌装机

Pickles Filling Machine

本机适用于瓶装、马口铁罐、塑料罐、广口瓶等容器。主要应用于榨菜、香菇酱、红油金针菇酱、海带丝、泡菜、萝卜干、梅菜、橄榄菜、杏鲍菇片、蘑菇酱、芥菜、香椿调味料、酸菜（碎粒）等各种酱菜产品。主要功能有缺料自动上料、自动伺服螺杆量杯计量、自动充填、自动注油、自动输送等功能。

This machine is suitable for bottles, tin cans, plastic cans, jars and other containers. Mainly used in pickles, shiitake mushroom sauce, red oil enoki mushroom sauce, shredded kelp, kimchi, dried radish, preserved vegetable, olive vegetable, pleurotus eryngii slice, mushroom sauce, mustard greens, toon seasoning, sauerkraut (particle) and other pickles product. The main functions as follows: automatic feeding when lack of material, automatic servo screw measuring cup measurement, automatic filling, automatic oil filling, automatic transportation and so on.



提升机
Hoister

料斗
Hopper

主要技术参数 Main Technical Parameter

型号 Model	包装容器规格 Container Specification	酱菜充填范围 Pickles filling range	油料灌装范围 Oil filling range	包装速度 Packaging speed	充填精度 Filling accuracy	总功率 Gross power	耗气量 Gas consumption	设备尺寸 Dimension of machine
LW-FSP50	φ 50~100mm	20ML~300ML	5ML~100ML	30~50p/min	≤ ±1%	3p 380v 4.5kw	0.6MPa 0.1m3/min	1700 x 1500 x 2300
LW-FSP20	φ 50~150mm	50g~5000g	5ML~60ML 50ML~150ML	10~25p/min	≤ ±1%	3P 380v 3KW	0.6MPa 0.1m3/min	1700*1200*2300

► 浓酱灌装机

Thick Jam Filling Machine

浓酱灌装机被广泛用于酱类、食品、日化等，可以灌装辣酱、番茄酱、蜂蜜、果酱、香菇酱、芥末酱、沙拉酱、含果肉饮料等。采用伺服控制，计量精度高，运行稳定。

Thick jam filling machine is widely used as sauces, foods, daily chemicals, etc., can fill hot sauce, tomato sauce, honey, jam, mushroom sauce, mustard sauce, salad dressing, pulp-containing beverages, etc. Using servo control, high measurement accuracy and stable operation.



主要技术参数 Main Technical Parameter

型号 Model	可灌装范围 Filler volume	用气量 Air consumption	灌装精度 Filling accuracy	总功率 Total power	主机尺寸 Machine size(mm)
LW-FPP-4A	10~60g	120L/Min	液体Liquid ≤ ±0.5% 膏体Paste ≤ ±1%	3 P 380V, 50/60Hz 1.369KW	L2200*W1020*H2250
LW-FPP-6A	30~100g	140L/Min	液体Liquid ≤ ±0.5% 膏体Paste ≤ ±1%	3 P 380V, 50/60Hz 1.69KW	L2500 x W1020 x H2250
LW-FPP-8A	50~250g	160L/Min	液体Liquid ≤ ±0.5% 膏体Paste ≤ ±1%	3 P 380V, 50/60Hz 2.07KW	L2500 x W1020 x H2250
LW-FPP-10A	100~500g	280L/Min	液体Liquid ≤ ±0.5% 膏体Paste ≤ ±1%	3 P 380V, 50/60Hz 2.82kw	L3000 x W1020 x H2250
LW-FPP-12A	200~1000g	300L/Min	液体Liquid ≤ ±0.5% 膏体Paste ≤ ±1%	3 P 380V, 50/60Hz 2.82kw	L3000 x W1020 x H2250

► 全自动塑杯充填封口机 Auto Cup Filling & Sealing Machine



全自动塑杯充填封口机对所使用的塑杯、塑盒进行灌装、封口、印码、输送等一次性流水作业包装，广泛应用于食品饮料行业的各种膏体液体产品的充填包装，如矿泉水、乳制品、豆制品、调味品、酿造品等。可根据客户需要定制各项功能。具有自动化程度高、生产能力大、操作便捷、外形美观等优点。与其他同类机型相比，采用进口触摸屏控制，操作更直观简单。

Auto Cup Filling & Sealing Machine can perform a complete set of production and packaging for plastic cups and boxes, such as filling, sealing, printing, and transportation. It is widely used in the filling and packaging of various paste liquid products in the food and beverage industry, such as mineral water, dairy products, soy products, condiments, brewed products, etc. Various functions can be customized according to customer needs. It has the advantages of high degree of automation, large production capacity, convenient operation and beautiful appearance. Compared with other similar models, it adopts imported touch screen control, and the operation is more intuitive and simple.

机器特点

- 全不锈钢制作，卫生且易清洗。
- 采用德国西门子可编程控制器 (PLC) 和触摸式人机界面，操作简单方便。
- 采用进口气动元件驱动，性能稳定，耐用可靠。
- 有机玻璃框架有效防止二次污染。
- 根据要求可定制。
- 外形美观，自动程度高，产量大。
- 在抽真空的基础上，可充各种混合气体，延长产品的保质期。

Features

- It is made of stainless steel, healthful and easy to clean.
- Digital display Siemens PLC interface with touching panel for easy operation.
- High quality pneumatic component ensure durability and steady.
- Environmental organic glass case manufacture.
- Function custom-built according to requirement.
- Elegant outline with fine automatization and large throughput.
- Other gas mixer available based on vacuum to extend fresh time.

► 玻璃瓶封口机LW-CTS200 Glass Bottle Capping Machine (With Lids Loader)




该机是为螺口瓶（罐）进行真空或非真空，旋压或套压封口作业而设计制造的专用设备。具有适应强、自动化程度高、封口质量可靠，操作维护方便，造型美观大方等优点。

This machine is a specially equipped designed and manufactured for vacuum or non-vacuum, spinning or casing sealing operation. It has the advantages of strong adaptability, high degree of automation, reliable sealing quality, convenient operation and maintenance, and beautiful appearance.



压盖机 LW-CPC150
LID PRESS CAPPING MACHINE LW-CPC150

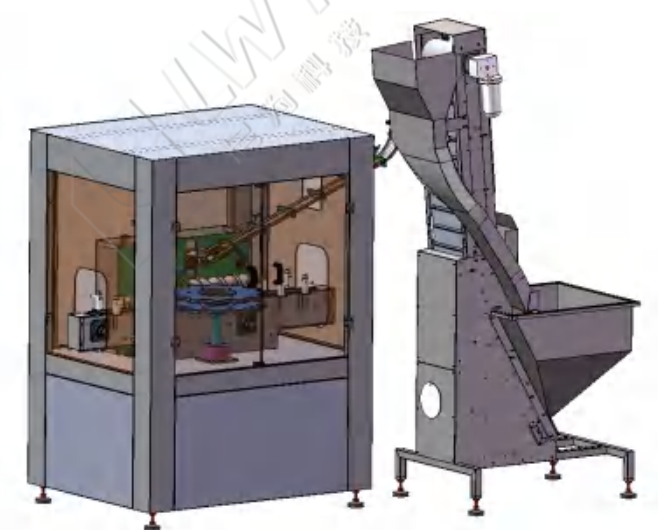

压盖机 LW-CPC350
LID PRESS CAPPING MACHINE LW-CPC350

► 马口铁罐封口机 Cans Sealing Machine

描述

自动真空封口设备，特别适用于马口铁罐，铝罐等多种瓶形。

有抽真空功能，也能加氮气。由此使产品保存时间长久。

Descriptions

Automatic Vacuum Sealing equipment, it specially used for tinplate, aluminum round cans and various different sealing types.

The machine can vacuumize and add nitrogen, thus to keep the product long time.



参数 Parameters

型号 Model	生产能力 Capacity	适用范围 Applied range	电机功率 Power	外形尺寸 Dimension
GT4C3	25 cans/min	D: 126-155mm H: 80-180mm	2.2kw	1400x1500x2000mm
GT4B2	42 cans/min	D: 52-108mm H: 46-125mm	1.5kw	1210x1450x1900mm
GT4B100H	100 cans/min	D: 50-110mm H: 25-160 mm	5.5kw	2350x1200x1850mm
GT100H	100 cans/min	D: 50-105mm H: 35-160mm	3kw	2350x1200x1850mm
GTZX-4	80-150 cans/min	D: 52.5-99mm H: 39-170mm	5.5kw	1700x1600x2000mm
GTZX-6	150-300 cans/min	D: 52.5-99mm H: 39-160mm	7.5kw	2150x1650x2200mm

杀菌机系列 Sterilization Machine

36-39



► 水浴巴氏杀菌机 Water bath pasteurization machine

规格 Specification

水浴杀菌机器采用304不锈钢，主要适用于各种罐头，调味品杀菌。机器有水箱，冷却箱，自动加热系统，水循环泵组成。性能稳定，操作简单，机器自动杀菌，冷却，烘干。


This machine adopts good quality 304 stainless steel, mainly is used to many kinds of canned, flavoring products' s pasteurization. It is made of hot water container, cold water container, automatic heating system, water circulation pump. Stable feature, easy to operate. This machine work whole automatically. Automatic sterilization, automatic temperature controlling, automatic cooling, automatic drying.



主要技术参数 Main Technical Parameter

型号 Model	LW-SB2424	LW-SB2624
杀菌温度 Sterilization temperature	90℃~98℃	90℃~98℃
机器尺寸 Machine size	L:24m W:2.4m	L:26m W:2.4m
材料 Material	304不锈钢 304stainless steel	304不锈钢 304stainless steel


► 袋装水浴巴氏杀菌机 Bag water bath pasteurization machine

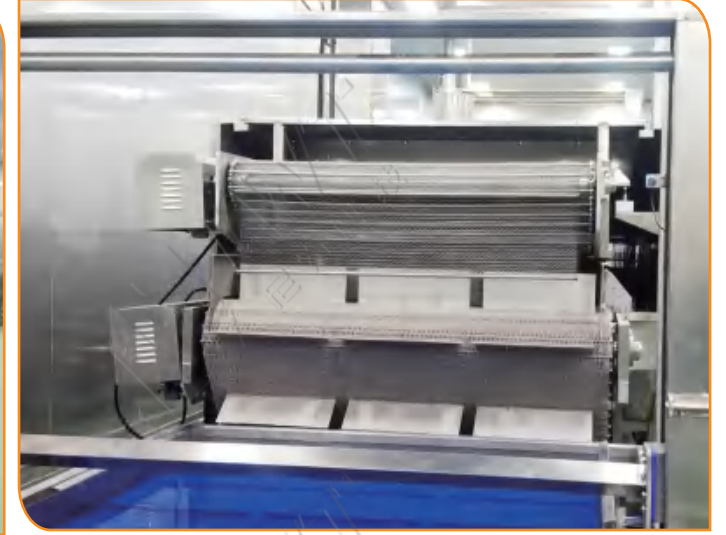

► 滚杠巴氏杀菌机 LW-SS2220 Roller bath pasteurization machine

滚杠巴氏杀菌机适用于各种圆罐、圆瓶的杀菌工艺，该设备通过滚杠的旋转带动产品旋转，使产品内部物料快速均匀受热，以达到杀菌工艺的要求。整机采用304不锈钢制作，箱体带有保温功能。杀菌箱体、冷却箱体长度与宽度可根据工艺要求选定。

The roller pasteurization machine is suitable for the sterilization process of various round cans and round bottles. The equipment rotates the product through the rotation of the roller, so that the internal materials of the product are heated quickly and evenly to meet the requirements of the sterilization process. The whole machine is made of SS304, and the tank has a heat preservation function. The length and width of the sterilization and cooling tanks can be customized according to the process requirements.

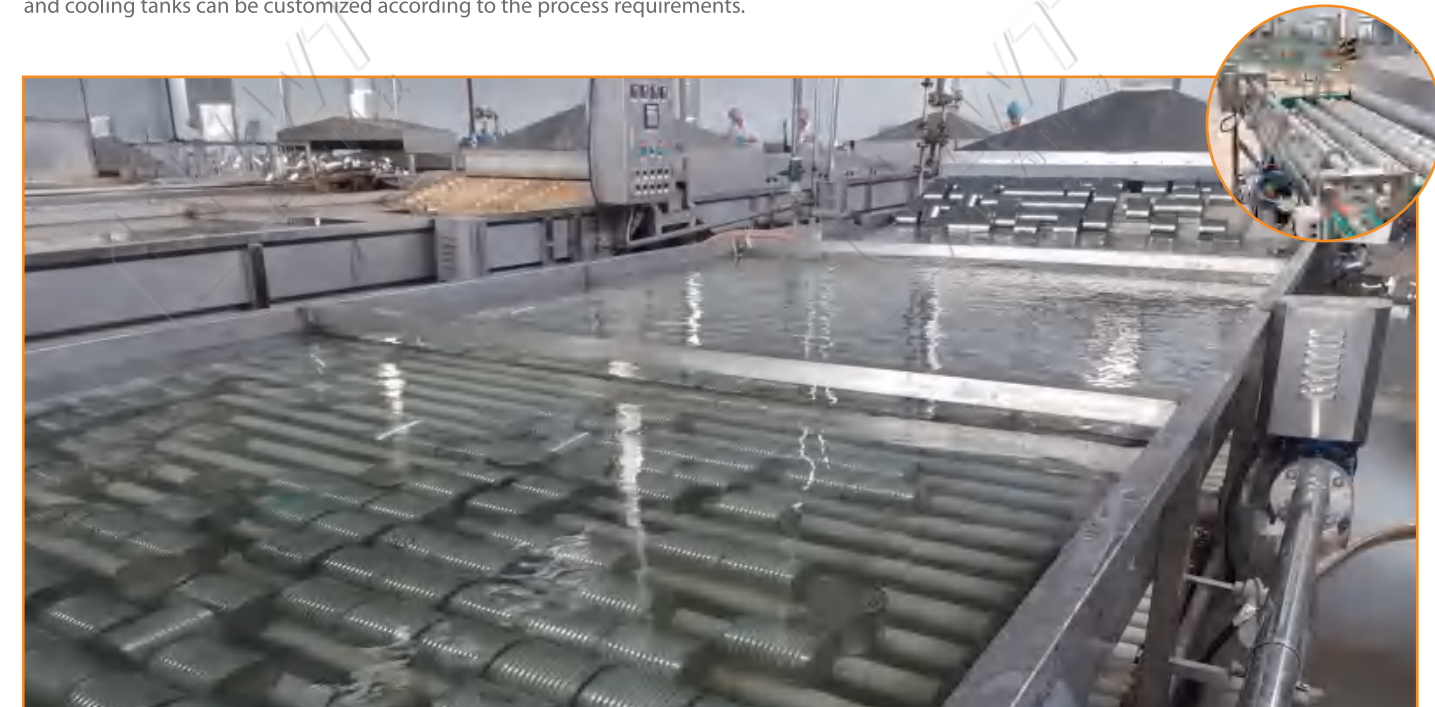

▶ 杀菌釜 Autoclave

规格 Specification

适用于肉类、豆类、蘑菇、鱼类等罐头高温高压调理杀菌，可选蒸汽式、水浴式、喷淋式、旋转式等杀菌方式。

The machine is suitable for high temperature and high pressure sterilization of canned meat, beans, mushrooms, fish etc.

steam, water bath, spray, rotary and other sterilization methods can be chosen.




型号 Model		LW-SR1031	LW-SR1233 LW-SR1239 LW-SR1245 LW-SR1249					LW-SR1346 LW-SR1365
项目 Items	单位 Units	1000#	1200#					1300#
筒长 Kettle length	mm	2400	2400	3000	3600	4000	3600	4500
总长 Total Length	mm	3100	3300	3900	4500	4900	4600	6500
总宽 Total Width	mm	4200	4700	4700	4700	4700	4500	4500
总高 Total Height	mm	1900	2200	2200	2200	2200	2450	2450
容量 Total Capacity	M3	2.1 X 2	3.1 X 2	3.8 X 2	4.5 X 2	4.9 X 2	5.3 X 2	6.5 X 2
食品筐 Food Basket	个	3 X 2	3 X 2	4 X 2	4 X 2	4 X 2	4 X 2	4 X 2
耗气量 Gas Consumption	Kg/batch	115	180	230	255	280	300	370
设备功率 Total Efficiency	KW	11	19.5	19.5	19.5	19.5	27	27
耗电量 Energy Cost	KW/h	7	14	14	14	14	16	16
设计温度 Designed Temperature	°C	1470	1470	1470	1470	1470	1470	1470
试验压力 Test Pressure	MPa	0.44	0.44	0.44	0.44	0.44	0.44	0.44
设计压力 Designed Pressure	MPa	0.35	0.35	0.35	0.35	0.35	0.35	0.35

生产线/输送设备系列
Production line/Conveyor

40~44

模块网输送机 LW-DHS
Mesh belt conveyor LW-DHS

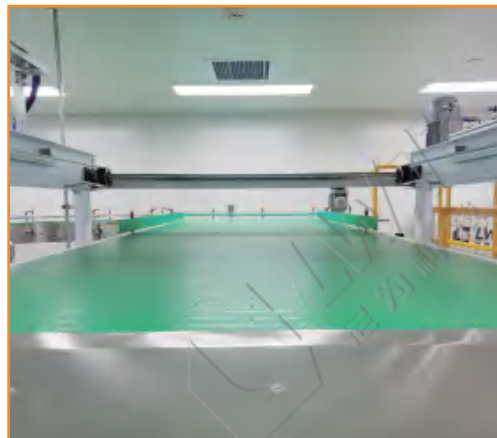

链板输送机 LW-DHP
Chain plate conveyor LW-DHP



皮带输送机 LW-DHB
Belt conveyor LW-DHB



滚筒输送机 LW-DHR
Roller conveyor LW-DHR



磁力提升机 LW-DLM
Magnetic lifting conveyor LW-DLM



链条输送机 LW-DHC
Chain conveyor LW-DHC



模块网输送机（带挡板提升） LW-DLS
Modular belt conveyor (lifter with baffle) LW-DLS



皮带输送机（带挡板提升） LW-DLB
Belt conveyor (lifter with baffle) LW-DLB



► 垂直提升输送机 LW-DLV Vertical Lifting Conveyor LW-DLV

适用于铁罐，玻璃和塑料瓶，纸板箱等运输。
Applied to transport metal can, glass or plastic bottle, paper box and etc.

功能及特点

- 快速，高容量的垂直运输
- 平滑处理产品
- 适用于灌装和包装生产线等
- 灵活，节省空间的系统

Feature

- Vertical Transportation with high speed and high capacity.
- Handle the products smoothly
- Suitable for Filling or Packing Production Lines
- Flexible system, save space.

► 螺旋升降输送机 LW-DLL Spiral Lifting Conveyor LW-DLL


螺旋输送机的常见用途是/机器之间的缓冲堆积，它也可以被用来作为一个生产的步骤，例如冷却或干燥；或仅仅是为了提高和降低（如灌装和包装线的收缩包装或纸箱包装的处理）。

The common use of the spiral Conveyor is buffering and accunulating between the machine, also it's also can be used as one production step,such as cooling,drying, or only used for lifting.(for example handling the filling or packing production lines).

连续式提升机
Continuous Lifter



夹持垂直提升输送
Claping Type Vertical Lifting Conveyor

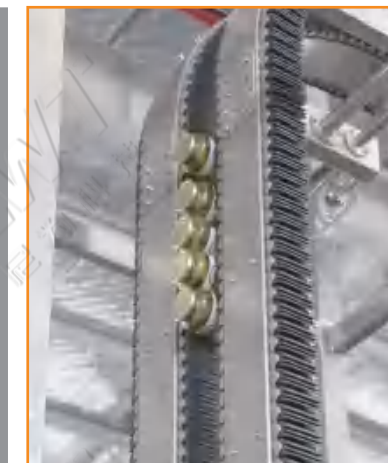

RGV台车
RGV cart



AGV台车
AGV cart



螺旋速冻机
Spiral Freezer



螺旋冷却机
Spiral Cooler



► 他们选择尼为 They Choose Leadworld

部分客户 (Part Customers)



优质部件 (Quality Components)

